




WICK® 4200-13H



PORTABLE FOUR STAGE HIGH PRESSURE FIRE PUMP

- Powered by a 4 stroke, air cooled Honda 13 HP* engine with over-speed protection
- Electric start (battery optional) with manual recoil backup
- Automotive style air cleaner and external oil filter
- Four stage foam compatible pump end, interchangeable with our 4 stage pumps and with our F200 two stage pump end for increased volume.
- Engine and pump are coupled with our stainless steel quick release clamp
- Maintenance-free speed increaser
- Standard discharge gauge and adaptor
- Choice of hand carrying tube frame or a channel base frame for vehicle mount
- Hand priming pump and pressure gauge included
- Optional non-return discharge valve
- Optional Remote Fuel (RFT) connection and optional exhaust primer

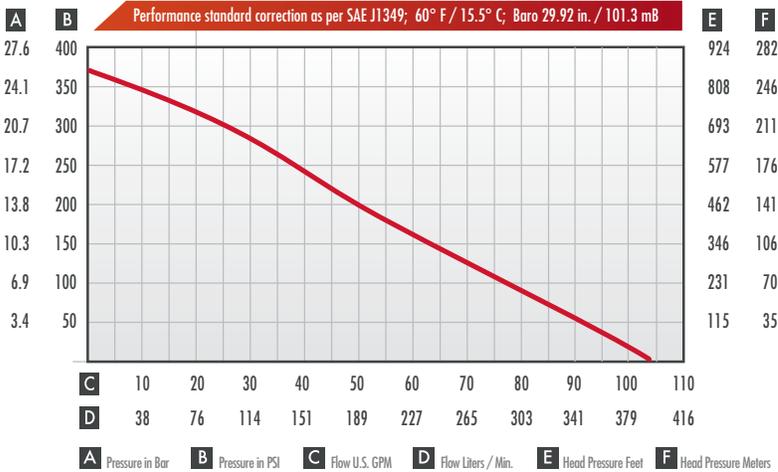

WEIGHT & DIMENSIONS

Length	33.0"	84 cm
Width	19.5"	50 cm
Height	18.5"	47 cm
Weight	123 lbs	56.7 kg
Suction	2.0" NPSH	50 mm
Discharge	1.5" NPSH	38 mm

ENGINE

Honda GX390	4 stroke
Oil filter	Cartridge-type spin-on filter
Fuel Tank Capacity	1.7 US Gal. 6.5 L
Electronic Ignition	

*Net power output is 11.7 Hp @ 3600 RPM. Mass production engines may vary from this value.

Specifications subject to change without notice

5838 Cypihot
Saint Laurent, QC
Canada, H4S 1Y5

Phone 514.335.4337
Phone 877.937.9660
Fax 514.335.9633

mercedestextiles.com
sales@mercedestextiles.com



WICK® 4200-13H

BID SPECIFICATION

- The pump must be powered by a Honda GX390 engine with over-speed protection
- The engine must be electric start with optional battery and have a manual recoil backup
- It must have an interchangeable four stage foam compatible pump end. The four stage pump end must also be interchangeable with two stage pump ends for increased volume.
- Must have a speed increaser that is a one-piece housing and that features a maintenance free belt/pulley design. Split belt housings are not acceptable and do not meet this specification.
- Must enable the drive belt to be checked without removing the pump or pump flange. Split belt housings that require disassembly is not acceptable and do not meet this specification.
- The pump end must attach to the speed increaser by the use of a one-piece stainless steel pump-mounting clamp. The clamp must also be fitted with a safety lock. Multi-part clamps do not meet this specification.
- Must come equipped with a full edge surround, anti-tip, low profile frame to permit easy handling or a channel mount frame. Narrow high profile frames which do not protect the pump and are unstable are not acceptable and do not meet this specification.
- It must include a hand priming pump and pressure gauge
- It must have an optional Remote Fuel (RFT) connection and optional exhaust primer
- The pump must have minimum flow and pressures as shown in the performance chart on the opposite page



WICK® 4200-13H

(CHANNEL FRAME / HORIZONTAL SPEED INCREASER MODEL)

Part#	Description
71WK4203-13HC	WICK® 4200-13H Pumper ..13 HP 4 Stroke Honda , 4 stage pump, Channel frame model for vehicle mount
71WK4203-13HT	WICK® 4200-13H Pumper ..13 HP 4 Stroke Honda , 4 stage pump, Tubular frame model for easy transportation
71WK4203-13HCH	WICK® 4200-13H Pumper ..13 HP 4 Stroke Honda , 4 stage pump, Horizontal Speed increaser model with channel frame
71WK4203-13HTH	WICK® 4200-13H Pumper ..13 HP 4 Stroke Honda , 4 stage pump, Horizontal Speed increaser model with tubular frame
71WK4203-13HCM1	WICK® 4200-13H Pumper .. Incl: 13 HP 4 Stroke Honda , 4 stage pump, Remote fuel and Exhaust primer model with Channel frame
71WK4203-13HCRFT	WICK® 4200-13H Pumper .. Incl: 13 HP 4 Stroke Honda , 4 stage pump, Remote fuel model with Channel frame



OPTIONAL

	Part#	Description
A	70FL15CVPPXX	Poppet Check Valve *
B	70FL15CVPPSPXX	Primer / Poppet Check Valve with 1" / 25mm NPT Side port *
C	70FLPFTXX	Fuel Tank (see website fuel section for complete listing)
D	70FLPFL-XX	Fuel Line (see website fuel section for complete listing)
E	70FL15TPPS	Thread protector 1 1/2" / 38mm
E	70FL20TPPS	Thread protector 2" / 51mm
F	70FL20DLP510	Drafilite HP suction hose .. 2"/51mm x 10'/3M c/w NPSH *
G	70FLP2PF	Foot Valve / Strainer 2"/51mm NPSH Female *
N/A	71W42-13HRFT	Remote fuel tank kit 13HP GX390 Honda
N/A	71W42-2771	Exhaust primer for Honda engine pumps

* See website for complete listing of accessory and related products

5838 Cypihot
Saint Laurent, QC
Canada, H4S 1Y5

Phone 514.335.4337
Phone 877.937.9660
Fax 514.335.9633

mercedestextiles.com
sales@mercedestextiles.com

© 2015 Mercedes Textiles Limited 106H /JH
© Represents registered trademarks of Mercedes Textiles Limited, unless otherwise noted
™ Represents trademarks of Mercedes Textiles Limited, unless otherwise noted